



OWNER'S MANUAL 2012 YETI DJ

YETI CYCLES
600 Corporate Circle, Unit D
Golden, CO 80401
888.576.9384

www.yeticycles.com



TABLE OF CONTENTS

BRAND OVERVIEW	06
FRAME FEATURES	08
GEOMETRY	10
MAINTENANCE SCHEDULE	12
 <i>SETUP</i>	
CABLE SETUP	14
 <i>TECHNICAL</i>	
DROPOUT OVERVIEW	16
ADJUSTABLE DROPOUTS	17
 <i>LEGAL</i>	
WARRANTY	20
CONTACT INFORMATION	21

WELCOME TO THE TRIBE. CONGRATULATIONS ON YOUR PURCHASE OF A NEW YETI.

We are confident your new bicycle will exceed your expectations for value, performance, and ride quality. Each frameset and component has been custom specified and designed to enhance your riding experience. Whether you are a beginner cyclist, or a seasoned pro, your Yeti bicycle will provide endless hours of two-wheeled fun.

This model specific manual is designed to be used in conjunction with the general Yeti Owner's Manual and the manuals supplied by the suspension manufactures. If you did not receive the Yeti owner's manual or the manual provided by the suspension manufacturer download the materials off the Internet, or contact your local dealer.

Bicycling can be a hazardous activity even under the best of circumstances. Proper maintenance of your bicycle is your responsibility and when done properly helps reduce the risk of injury and damage to your bicycle.

Warning: Make sure you review and understand the warnings, instructions, and content of this manual and accompanying manuals for your bicycle.

Warning: Technological advances have made bicycles and bicycle components more complex and the pace of innovation is increasing. It is impossible for this manual or the accompanying manuals to provide all the information required to properly repair and/or maintain your bicycle. In order to help minimize the chances of an injury, it is critical for you to have work performed by an authorized Yeti retailer.

This manual outlines basic setup and maintenance recommendations of your new Yeti. Because it is impossible to anticipate every situation or condition that may occur during the assembly, setup, and maintenance of your bicycle, Yeti recommends that all service and repairs be performed by your local authorized Yeti Dealer.


This manual contains many "Warnings" and "Cautions" concerning the consequences of failure to maintain or inspect your bicycle. The word "Warning" indicates a potentially hazardous situation in which, if not avoided, could result in serious injury or death. The word "Caution" indicates a potentially hazardous situation in which, if not avoided may result in minor injuries or damage to your bicycle or a component of your bicycle. Be sure to read and understand all of the Warnings and Cautions listed in the manual.

THE DJ IS AT HOME ON A RACE COURSE OR AT YOUR LOCAL DIRT JUMP SPOT.

1. WORLD CUP PROVEN GEOMETRY
2. TAPERED HEADTUBE
3. HYDROFORMED TUBESET
4. 73 MM BOTTOM BRACKET SHELL
5. ISCG '05 MOUNTS
6. ADJUSTABLE DROPOUTS
7. SINGLE SPEED COMPATIBLE

1. The geometry for the DJ is based on extensive feedback from World Cup 4X shredder Jared Graves.
2. The DJ has a tapered head tube. The bottom cup is 1.5" and the top cup is 1.125". This creates a very stiff front end in combination with a tapered fork without adding additional weight.
3. Oversized custom hydroformed tubeset with integrated yokes. make the frame stiff and strong while providing ample clearance while riding.
4. The DJ features a 73mm bottom bracket shell, for use with a 113mm spindle.
5. For even greater stiffness the DJ features ISCG 05' tabs that are machined directly into the bottom bracket shell.
6. Dial in the chain stay length you prefer with adjustable sliding dropouts that allow for 15mm of adjustment, independent of your rear brake adjustments.
7. Adjustable length chain stays with hidden micro tension screws allow the DJ to be set up as a single speed.

GEOMETRY

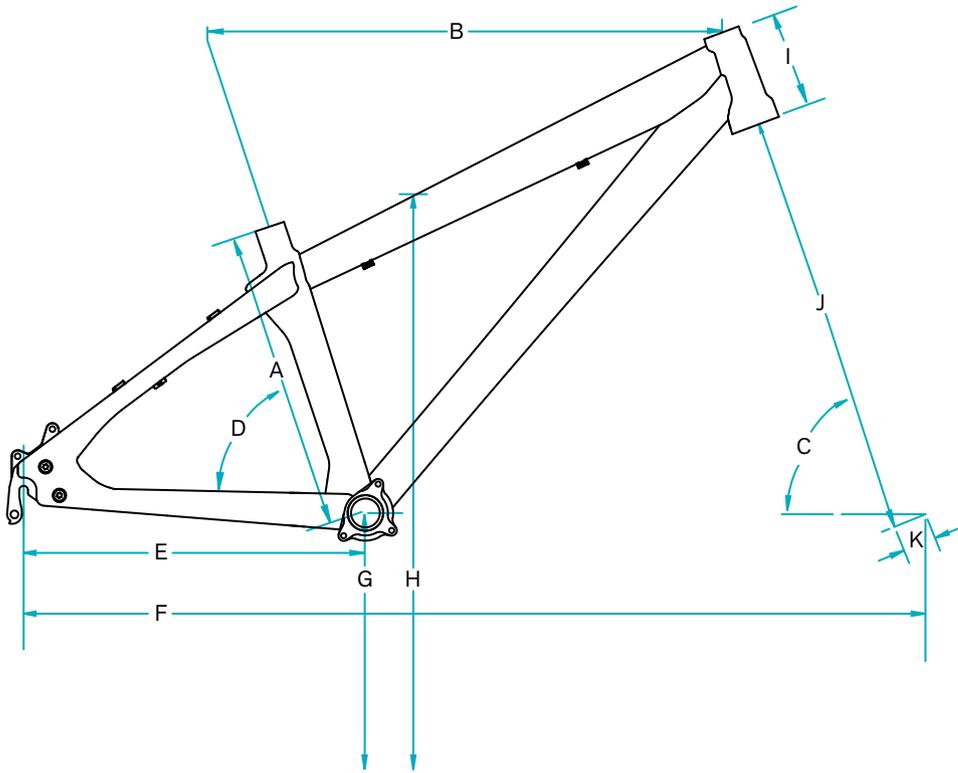

FIT

SMALL	5'3" (160 CM) - 5'7" (171 CM)
MEDIUM	5'7" (171 CM) - 5'11" (180 CM)
LARGE	5'11" (180 CM) - 6'3" (191 CM)

80 MM FORK

	SM	MD	LG
A	13.8	13.8	13.8
B	22.5	23.5	24.5
C	69.5	69.5	69.5
D	71.5	71.5	71.5
E	15.6-16.1	15.6-16.1	15.6-16.1
F	40.2-40.8	41.2-41.8	42.2-42.8
G	12.3	12.3	12.3
H	26.8	26.6	26.4
I	4.5	4.5	4.5
J	17.8	17.8	17.8
K	1.5	1.5	1.5

100 MM FORK

	SM	MD	LG
A	13.8	13.8	13.8
B	22.6	23.6	24.6
C	68.5	68.5	68.5
D	70.5	70.5	70.5
E	15.6-16.1	15.6-16.2	15.6-16.3
F	40.4-41.0	41.4-42.0	42.4-43.0
G	12.5	12.5	12.5
H	27.1	26.9	26.7
I	4.5	4.5	4.5
J	18.5	18.5	18.5
K	1.5	1.5	1.5

*All measurements are in inches

KEEP YOUR NEW YETI FRESH AND CLEAN

OVERVIEW

Following these guidelines will help maintain the performance of your bicycle and prevent more serious problems from arising. It is important to remember that service intervals can vary depending on climate, trail conditions and riding frequency. If you are unsure about working on your own bicycle, contact your authorized Yeti Dealer or visit the repair help section at www.parktool.com for more information on general bicycle maintenance.

SCHEDULE

	WEEKLY	MONTHLY	3 MONTHS	ANNUALLY
CLEAN AND LUBE CHAIN	■			
CHECK TIRE PRESSURE	■			
CLEAN BIKE OF MUD AND DEBRIS	■			
CHECK BRAKE FUNCTION	■			
CHECK SHOCK PRESSURE, IF APPLICABLE	■			
CHECK FOR LOOSE BOLTS AND TIGHTEN, IF NECESSARY	■			
CHECK HEADSET AND TIGHTEN / LOOSEN, IF NECESSARY		■		
THOROUGHLY CLEAN PIVOT POINTS WITH A RAG (DO NOT LUBRICATE)		■		
REPLACE BRAKE PADS, IF NECESSARY			■	
CHECK TIRES FOR WEAR			■	
CHECK SPOKE TENSION AND RETENTION, IF NECESSARY			■	
CHECK CHAIN FOR WEAR AND REPLACE IF NECESSARY			■	
COMPLETE TUNE-UP PERFORMED BY AN AUTHORIZED YETI DEALER				■

CABLE SETUP

YETI TIPS

The DJ has full cable housing. By using full cable housing, we have eliminated break points in the line of your shifter housing. This allows riders to experience better overall shifting performance by reducing the entrance of unwanted elements such as sweat and sediment. Use of full cable housing helps prevent corrosion from the elements and keeps the shifting smoother for a longer period of time.

Caution: The failure to properly route shifter housing can cause malfunction of the shift mechanism and unexpected shifting of gears.



01. REAR DERAILLEUR

Fit the housing from the rear shifter along the head tube and through the bolt-on cable stops on the bottom of the top tube. There are three bolt-on stop groups on the bottom of the top tube to which the housing and brake line can be attached, each with two positions to secure housing. Fit the rear housing line along the top tube through these stops, using the position closest to the drive side. Next, route the housing around the outside of the seat tube on the drive side and down the drive side seat stay. Attach the housing using the two bolt-on cable stops on the top of the seat stay. Loop the housing into the derailleur to finish.



02. REAR BRAKE

The rear brake line loops across the head tube and runs through the three bolt-on cable stops on the non-drive side of the top tube. Use the position closest to the non-drive side on the cable guides for the rear brake line. Next, route the brake line around the seat tube and down the non drive side seat stay. Use the two bolt-on cable guides on the bottom of the seat stay to secure the line. Ensure the line is finished on the inside of the seat stay when attached to the caliper body. This will prevent the brake line from being compromised if the bike or rider falls.

DROPOUT SYSTEMS

YETI TIPS

Make sure your tools are in good condition. A worn allen key can round the hex on a bolt not allowing for proper torque.

Torque settings are listed throughout the instructions. It is also important to prep all bolt threads. The instructions denote whether to use a blue Loctite compound or grease.

Warning: Service on Yeti bicycles requires special knowledge and tools. Yeti Cycles recommends that all service and repairs be performed by an authorized Yeti Dealer

TOOLS NEEDED

- 5mm allen key



01. DROPOUT ADJUSTMENT

Loosen the two M8x22mm dropout bolts located at each chain stay and seat stay junction with a 5mm allen key.



02. DROPOUT ADJUSTMENT

Loosen the M6x34mm tension bolt located on the top of the each chain stay with a 5mm allen key.



03. DROPOUT ADJUSTMENT

Slide the dropouts to the desired chain stay length. Use the hash marks on the dropouts to ensure both dropouts are square and the rear wheel is centered in the frame.



04. DROPOUT ADJUSTMENT

Tighten the two M6x34mm tension bolts on the frame with a 5mm allen key to make the final adjustments for the desired chain stay length and to achieve proper chain tension. Ensure both sides are tightened equally and the rear wheel stays centered in the frame.

Torque to 10-15 in/lb.





05. DROPOUT ADJUSTMENT

Tighten the two M8x22mm dropout bolts on the drive side of the frame with a 5mm allen key. Repeat for the non-drive side.

Torque to 70-75 in/lb.



06. DROPOUT ADJUSTMENT

Double check that the dropouts are square and the rear wheel is centered in the frame. When assembling the DJ for the first time it will be helpful to set the chain stay to the desired length before measuring and cutting the chain. This will help ensure proper chain tension for the bicycle. When making a large adjustment of the chain stay length after the bicycle is assembled be aware that a change to the chains length may be necessary.

WARRANTY

YETI LIMITED (1) ONE YEAR FRAME WARRANTY

(applies to 303 WC / 4X / DJ)

Yeti Cycles will repair or replace, at its option, any frame it determines to be defective due to defective materials and/or workmanship. The (1) one year limited warranty is conditioned upon the bicycle being ridden under normal conditions and having been properly maintained. This warranty does not apply to the components attached to the frameset such as suspension components, wheels, drive train, brakes, seatpost, handlebar and stem. This warranty applies only to the original owner and is non-transferable. This warranty is void if the bicycle was not properly assembled by an authorized Yeti dealer.

YETI LIMITED (2) TWO YEAR FRAME WARRANTY

(applies to AS-R 5C / AS-R 5A / AS-R Carbon / SB66-A / SB66-C / SB95 / 575 / ARC / Big Top 29'R)

Yeti Cycles will repair or replace, at its option, any frame it determines to be defective due to defective materials and/or workmanship. The (2) two year limited warranty is conditioned upon the bicycle being ridden under normal conditions and having been properly maintained. This warranty does not apply to the components attached to the frameset such as suspension components, wheels, drive train, brakes, seatpost, handlebar and stem. This warranty applies only to the original owner and is non-transferable. This warranty is void if the bicycle was not properly assembled by an authorized Yeti dealer.

ADDITIONAL CONDITIONS

These limited warranties do not apply to normal wear and tear, nor to claimed defects, malfunctions or failures that result from abuse, neglect, improper assembly, improper maintenance, alteration, collision, crash or misuse. The original owner shall pay all labor charges connected with the repair or removal of all components. Under no circumstance does this limited warranty include the cost of travel or shipment to and from an authorized Yeti dealer. In order to exercise your rights under these limited warranties, the bicycle or frameset must be presented to an authorized Yeti dealer, together with proof of purchase.

**The above warranties have been in effect since January 2012. For warranty information on Yeti frames sold prior to that date please consult your local authorized dealer.*

NO FAULT REPLACEMENT POLICY

Yeti Cycles will make replacement parts available at a minimum charge to the original owner in the event of a crash or any other non-warranty situation. Yeti Cycles does this at its sole discretion and reserves the right to refuse this offer.

PRODUCT LIFE CYCLE

Every YETI frameset has a useful product life cycle. The length of that useful product life cycle will vary depending on the construction and the materials of the frameset, maintenance and care the frameset receives, and the amount and type of use the frameset is subjected to over its life. YETI recommends that an authorized YETI dealer should inspect the frame for stress annually. Frame stress could cause potential failure and the signs are usually apparent in the form of cracks, fracture lines, deformation, dents, and any other visual indicators of abnormality. These safety checks for frame stress are important to prevent accidents, injury to the cyclist, and product failure of a YETI frameset.

DISCLAIMER

YETI Cycles is not responsible for any damages to you or others arising from riding, transporting or other use of your bicycle. In the event that your frame breaks or malfunctions, YETI Cycles shall have no liability or obligation beyond the repair or replacement of your frame pursuant to the terms outlined in the warranty.

**If you have a warranty concern, please contact your authorized Yeti dealer.*

YETI CYCLES

600 Corporate Circle, Unit D
Golden, CO 80401
(p) 303-278-6909
(f) 303-278-6906
www.yeticycles.com

BUSINESS HOURS

Monday-Friday
8AM-11:30AM, 1:00PM-5:30PM
(Mountain Time)